ESEN119A

FPO-001 Fingerprint Optical Scan OEM Module V2

User Manual V.1.1

Thaieasyelec

enable your design

Table of Contents

1. SUMMARY **4**
1.1 Main functions 4
1.2 Application examples 4
1.3 Technology Parameter 5
1.4 Default Setting 5

2.CONFIGURATION AND CONNECTOR **6**
2.1 Mount and Connector 6
2.2 Dimension 7

3.COMMUNICATION PROTOCOL **8**
3.1 The process of communication 8
3.2 Classify of communication packet 9
3.2.1 Command packet 9
3.2.2 Response packet 9
3.2.3 Data Packet 9
3.3 Packet Structure 9
3.3.1 Packet Identify Code 9
3.3.2 Structure of Command Packet 9
3.3.3 Response packet 10
3.3.4 Command Data Packet 10
3.3.5 Response Data Packet 11

4.PACKET COMMAND DETAIL DESCRIPTION **12**
4.1 Structure of Fingerprint Template Data is follow 12
4.2 Command List 12
4.3 Command Packet Description 15
4.3.1 Verify 15
4.3.2 Identify 17
4.3.3 Enroll 19
4.3.4 Enroll One Time 22
4.3.5 Clear Template 24
4.3.6 Clear All Template 25
4.3.7 Get Empty ID 26
4.3.8 Get Template Status 27
4.3.9 Get Broken Template 28
4.3.10 Read Template 29
4.3.11 Write Template 31
4.3.12 Set Security Level 33
4.3.13 Get Security Level 35
4.3.14 Set Finger Time Out 36
4.3.15 Get Finger Time-out 37
4.3.16 Set Device ID 38
4.3.17 Get Device ID 39
4.3.18 Get F/W Version 40
4.3.19 Finger Detect 41
4.3.20 Set Baud Rate 42
4.3.21 Set Duplication Check (ON/OFF) 43
4.3.22 Get Duplication Check 44
4.3.23 Enter Standby Mode 45
4.3.24 Enroll And Store in RAM 46

4.3.25 Get Enroll Data 48
4.3.26 Get Feature Data of Captured FP 50
4.3.27 Verify Downloaded Feature With Captured FP 52
4.3.28 Identify Downloaded Feature With Captured FP 55
4.3.29 Get Device Name 58
4.3.30 Sensor LED Control 59
4.3.31 Identify Free 60
4.3.32 Set Device Password 62
4.3.33 Verify Device Password 63
4.3.34 Get Enroll Count 64
4.3.35 FP Cancel 65
4.3.36 Test Connection 67
4.3.37 Incorrect Command 68

5. APPENDIX 69
5.1 Response and Error Code 69
5.2 Flow of Enroll and Verify and Identify process 71
5.2.1 Enroll 71
5.2.2 Verify & Identify 72

1. Summary

FPO-001 is All-in-one (Optic sensor +CMOS image sensor + CPU +Flash memory) embedded stand-alone fingerprint identification modules. It is convenient for second development, extremely easy to integrate minimizing time-to-market.

1.1 Main functions

Optic sensor is reliable and Low-cost, High ESD Protection

1. 1:N Identification (One-to-Many)
2. 1:1 Verification (One-to-One)
3. High speed fingerprint identification algorithm engine
4. Self-study function
5. Fingerprint template data read from /write to FLASH memory function
6. Get Feature Data of Captured fingerprint
7. Verify Downloaded Feature with Captured fingerprint
8. Identify Downloaded Feature with Captured fingerprint
9. Security Level setting
10. Standby mode
11. Communication interface :UART

1.2 Application examples

- Access control systems
- Time & Attendance
- Locks, safes
- POS terminals

1.3 Technology Parameter

Item	Description
CPU	ACS (120MHz, 1Mbits Flash, 128K SRAM)
Sensor	Optic sensor
Fingerprint capacity	500~5000 can be enlarge, default setting is 3000 fingerprints
FAR	< 0.001 %（Security Level is 3）
FRR	< 0.1 %（Security Level is 3）
Match Mode	1:N identification and 1:1 verification
Fingerprint Data size	496 Byte
Security level	Level 1 to Level 5 can be set , default setting is : Level 3
Time of Response	Fingerprint pretreatment < 0.45
	1:N matching（2000 fingerprints）< 1s
Resistant to Abrasion	>1 Million Finger Press
Communication	UART Parity = NONE, Stop Bit = 1,Flow Control = NONE Baud rate is 9600/19200/38400/57600/115200 (BPS) Default setting：9600bps
Working Voltage	DC 3.3V±5%
Working Current	Max 100mA Standby Mode less than 5mA
Working Environment	Working Temperature：-10 ℃- 60 ℃ Relative humidity：20%– 80%
Storage Environment	Storage temperature: -20℃ ~80℃ Storage humidity:<90%

1.4 Default Setting

Item	Default Value
Security Level (1～5)	3
Finger Time Out (0～60S)	5s
Baud Rate (9600， 19200， 38400， 57600， 115200) bps	9600 bps
Fingerprint Duplication Check (ON/OFF)	ON

2. Configuration and Connector

2.1 Mount and Connector

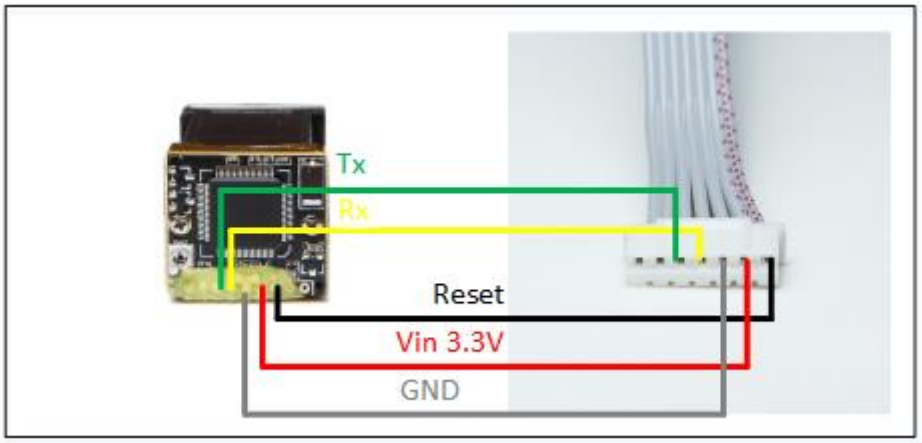

Connector Signal description

Pin No.	Signal name	Signal Description
PIN 1	Reset	<<Unused>>
PIN 2	VIN	DC Input, range of voltage is **Power 3.3V (±5%)**
PIN 3	GND	GND
PIN 4	UART-TX	Module Transmit Output, **Tx 3.3V TTL**
PIN 5	UART-RX	Module Receive Input, **Rx 3.3V TTL**
PIN 6	+3.3V	<<Unused>>
PIN 7	WAKEUP	<<Unused>>

Please note that old module have 2 versions of PCB, previous (Blue) and current (Green), different in pins assignment. Use their cable's color to identify.

Version 2 module have black PCB with 7 pins cable. Reset pin located on red dotted line marked as PIN1.

Attention!!! Power supply is only 3.3V, 5V or more might destroy the module.

2.2 Dimension

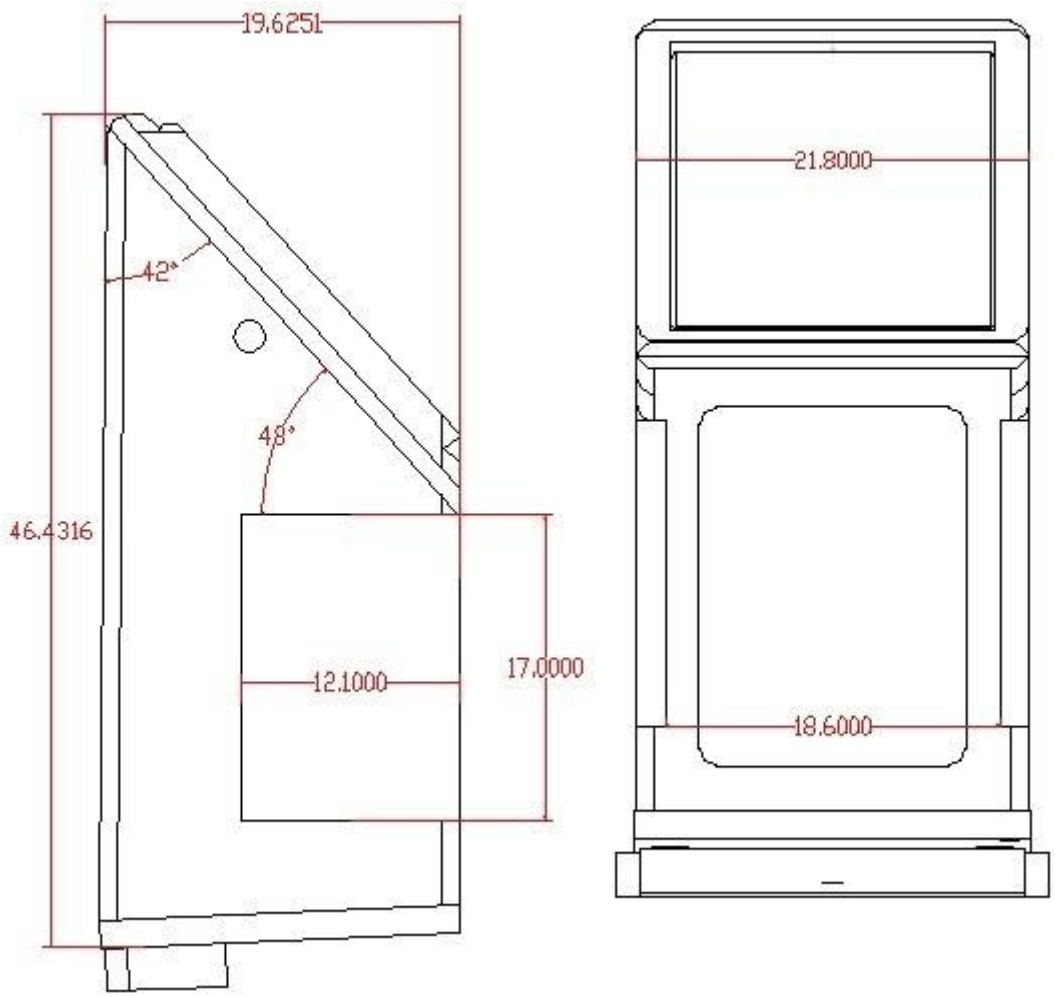

3. Communication Protocol

The module is used as a slave device. The Master device sends relative commands to control it. The CMD sent by the master and the ACK signal returned by the module.

Command interface: UART (Universal Asynchronous Receiver Transmitter)

Default Setting is: 9600BPS, 1 start-bit, 1 stop-bit, no parity check bit

3.1 The process of communication

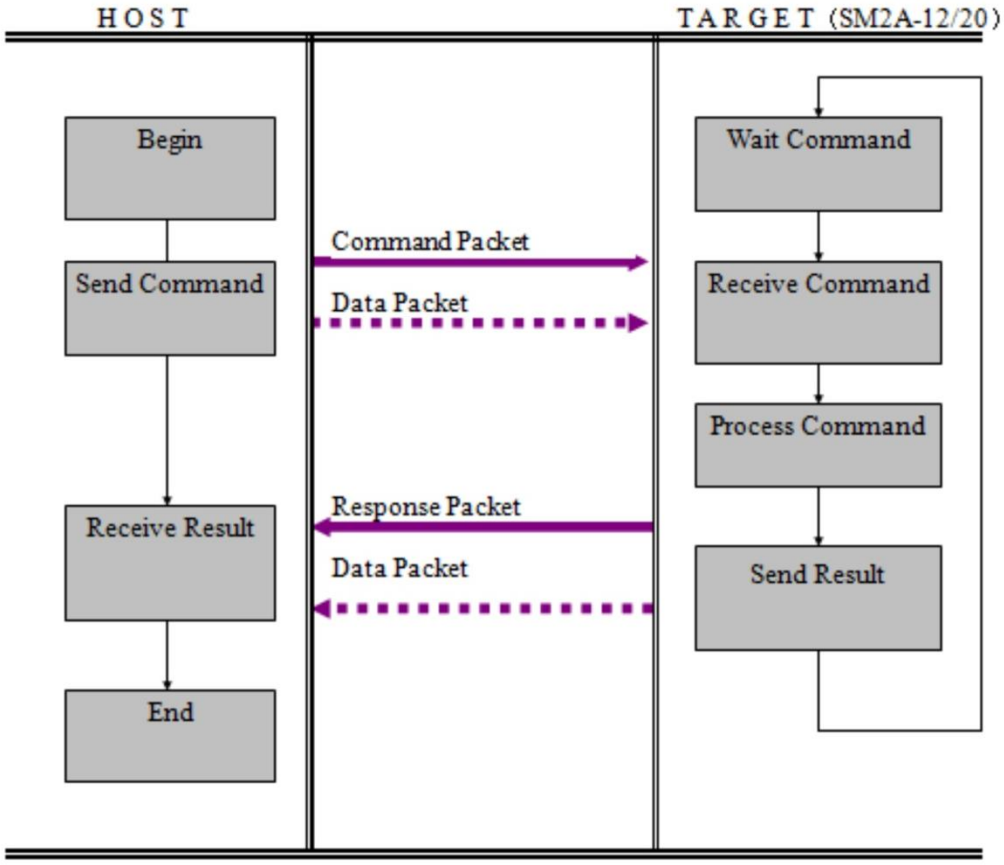

Fig3-1.Process of Communication

Notice. Host do not send next command until receive result, except send FP Cancel

3.2 Classify of communication packet

3.2.1 Command packet

Command Packet is the instruction from Host to Target, Total length of the command packet is 24 Bytes.

3.2.2 Response packet

Response packet is result of execute command packet, from Target (SM2A-xx) to Host, Total length of the command packet is 24 Bytes

3.2.3 Data Packet

When length of Command Parameter or Data is larger than 16 Bytes, Utilize Data Packet to transmit block Data, the maximum length of Data Packet is 512Bytes

3.3 Packet Structure

3.3.1 Packet Identify Code

Section of start 2byte prefix define type of packet

Type of Packet	Code
Command packet	0xAA55
Response packet	0x55AA
Command Data Packet	0xA55A
Response Data Packet	0x5AA5

3.3.2 Structure of Command Packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	L	H	L	H	D0	D1	...	D15	L	H
0	1	2	3	4	5	6	7	...	21	22	23

OFFSET	FIELD	TYPE	SIZE	DESCRYPTION
0	PREFIX	WORD	2byte	Packet Identify code
2	CMD	WORD	2byte	Command Code
4	LEN	WORD	2byte (=n, n < 17)	Length of Command Parameter
6	DATA	Byte array	16byte	Command Parameter
22	CKS	WORD	2byte	Check Sum is the low word of value listed below: offset[0] + offset[1] + ...+offset[21]

3.3.3 Response packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	L	H	L	H	L	H	D0	D1	...	D13	L	H
0	1	2	3	4	5	6	7	8	9	...	21	22	23

OFFSET	FIELD	TYPE	SIZE	DESCRYPTION
0	PREFIX	WORD	2byte	Packet Identify code
2	RCM	WORD	2byte	Response Code
4	LEN	WORD	2byte(=n, n < 17)	RET and DATA
6	RET	WORD	2byte	Result Code (0 :success, 1 :fail)
8	DATA	Byte array	14byte	Response Data (n-2 byte)
22	CKS	WORD	2byte	Check Sum is the low word of value listed below: offset[0] + offset[1] + ...+offset[21]

3.3.4 Command Data Packet

PREFIX		CMD		LEN		DATA				CKS	
0x5A	0xA5	L	H	L	H	D0	D1	...	Dn-1	L	H
0	1	2	3	4	5	6	7	...	6+n-1	6+n	6+n+1

OFFSET	FIELD	TYPE	SIZE	DESCRYPTION
0	PREFIX	WORD	2byte	Packet Identify code
2	CMD	WORD	2byte	Command Code
4	LEN	WORD	2byte(=n , n < 512)	Length of DATA
6	DATA	Byte array	nbyte	Command parameter
6+n	CKS	WORD	2byte	Check Sum is the low word of value listed below: offset[0] + offset[1] + ...+offset[6+n-1]

Before send Command Data packet, Host first send Command packet which set the length of next command data packet in Data Field

3.3.5 Response Data Packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xA5	0x5A	L	H	L	H	L	H	D0	D1	...	Dn-3	L	H
0	1	2	3	4	5	6	7	8	9	...	6+n-1	6+n	6+n+1

OFFSET	FIELD	TYPE	SIZE	DESCRYPTION
0	PREFIX	WORD	2byte	Packet Identify code
2	RCM	WORD	2byte	Response Code
4	LEN	WORD	2byte(=n, n < 512)	Length of result data (RET + DATA)
6	RET	WORD	2byte	Result code (0 : success 1 : fail)
8	DATA	Byte array	（n-2）byte	Response data
6+n	CKS	WORD	2byte	Check Sum is the low word of value listed below: offset[0] + offset[1] + ...+offset[6+n-1]

4. Packet Command Detail Description

4.1 Structure of Fingerprint Template Data is follow

Template Data (496 Bytes) + Checksum (2 Bytes) = 498 Bytes

Template Data	Checksum
496 bytes Template Data D0,D1,…D495	2 byte Check Sum is the low word of value listed below: D0+D1+…+D495

4.2 Command List

No	Function	Command			Response			
		CMD	LEN	DATA	RCM	LEN	RET	DATA
1	Verify	0x0101	2	Template No.	0x0101	4	0/1	Template No./ Error Code
2	Identify	0x0102	0	-	0x0102	4	0/1	Template No ./ Error Code
3	Enroll	0x0103	2	Template No.	0x0103	4/6	0/1	Template No. / Error Code + Duplication ID
4	Enroll One Time	0x0104	2	Template No.	0x0104	4/6	0/1	Template No. / Error Code
5	Clear Template	0x0105	2	Template No.	0x0105	4	0/1	Template No. / Error Code
6	Clear All Template	0x0106	0	-	0x0106	4	0/1	Cleared Template Count / Error Code
7	Get Empty ID	0x0107	0	-	0x0107	4	0/1	Template No. / Error Code
8	Get Template Status	0x0108	2	Template No.	0x0108	4	0/1	Template Status /Error Code

No	Function	Command			Response			
		CMD	LEN	DATA	RCM	LEN	RET	DATA
9	Get Broken Template	0x0109	0	-	0x0109	6	0/1	Broken Template Count + First Broken Template No./Error Code
10	Read Template	0x010A	2	Template No.	0x010A	(Template Record Size + 4) or (4)	0/1	Template No + Template Record Data /Error Code
11	Write Template	0x010B	Template Record Size + 2	Template No. + Template Record Data	0x010B	4	0/1	Template No. / Error Code
12	Set Security Level	0x010C	2	Security Level Value	0x010C	4	0/1	Security Level Value/Error Code
13	Get Security Level	0x010D	0	-	0x010D	4	0	Security Level Value
14	Set Finger Time Out	0x010E	2	Time Out Value	0x010E	4	0/1	Time-out Value / Error Code
15	Get Finger Time Out	0x010F	0	-	0x010F	4	0	Time-out Value
16	Set Device ID	0x0110	2	Device ID	0x0110	4	0	Device ID
17	Get Device ID	0x0111	0	-	0x0111	4	0/1	Device ID / Error Code
18	Get F/W Version	0x0112	0	-	0x0112	4	0	F/W Version
19	Finger Detect	0x0113	0	-	0x0113	4	0	Detect Result
20	Set Baud Rate	0x0114	2	Baud Rate Index	0x0114	4	0/1	Baud Rate Index / Error Code
21	Set Duplication Check	0x0115	2	Duplication Check Option(1/0)	0x0115	4	0/1	Duplication Check Option /Error Code
22	Get Duplication Check	0x0116	0	-	0x0116	4	0	Duplication Check Option
23	Enter Standby Mode	0x0117	0	-	0x0117	4	0	-

No	Function	Command			Response			
		CMD	LEN	DATA	RCM	LEN	RET	DATA
24	Enroll And Store in RAM	0x0118	0	-	0x0118	4	0/1	0 / Error Code
25	Get Enroll Data	0x0119	0	-	0x0119	(Template Record Size + 2) or (4)	0/1	Template Record Data /Error Code
26	Get Feature Data of Captured FP	0x011A	0	-	0x011A	(Template Record Size + 2) or (4)	0/1	Template Record Data /Error Code
27	Verify Downloaded Feature with Captured FP	0x011B	Template Record Size	Template Record Data	0x011B	4	0/1	0/Error Code
28	Identify Downloaded Feature with Captured FP	0x011C	Template Record Size + 2	Index + Template Record Data	0x011C	4	0/1	0/Error Code
29	Get Device Name	0x0121	0	-	0x0121	16	0/1	"STO20-OEM" /Error Code
30	Sensor LED Control	0x0124	2	0/1	0x0124	4	0	0
31	Identify Free	0x0125	0	-	0x0125	4	0/1	Template No. / Error Code
32	Set Device Password	0x0126	14	Password	0x0126	4	0/1	0/ Error Code
33	Verify Device Password	0x0127	14	Password	0x0127	4	0/1	0/ Error Code
34	Get Enroll Count	0x0128	0		0x0128	4	0/1	Enroll Count /Error Code
35	FP Cancel	0x0130	0	-	0x0130	2	0	-
36	Test Connection	0x0150	0	-	0x0150	2	0	-
37	Incorrect Command	-	-	-	0x0160	2	0	-

Table4-2 Command List

4.3 Command Packet Description

4.3.1 Verify

[Function] one to one match

[Operation Sequence]

1. if the template No. is invalid, result= ERR_INVALID_TMPL_NO;

2. if the template No. there is no template data, result= ERR_TMPL_EMPTY;

3. detect finger whether press on sensor or not repeatedly,

if no any finger press on sensor in the period of timeout, result= ERR_TIME_OUT;

4. else check quality of the captured fingerprint image

if image is not good, result= ERR_BAD_QUALITY

5. else result=GD_NEED_RELEASE_FINGER, denote that lift finger;

6. verify the captured fingerprint with the appoint template data

if verify ok, result=Template No.; else result= ERR_VERIFY;

7. In the period of process verify command, if module received “FP Cancel” command,

The module then stop verify command and return ACK that is ERR_FP_CANCEL;

Please refer to appendix 5.2.2 about the flow of Verify & Identify

[Command and Response]

Command Packet	
PREFIX	0xAA55
CMD	0x0101
LEN	2
DATA	Template No.
CKS	Checksum
Response Packet	
PREFIX	0x55AA
RCM	0x0101

LEN		4
RET		ERR_SUCCESS or ERR_FAIL
DATA	2byte	Success: GD_NEED_RELEASE_FINGER or Template No. Fail: Error Code is as follow ERR_VERIFY ERR_INVALID_TMPL_NO ERR_TMPL_EMPTY ERR_TIME_OUT ERR_BAD_QUALITY
CKS		Checksum

[Example of Verify Command]

1. Host send Verify, Template No.=1,command packet as follow

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x01	0x01	0x02	0x00	0x01	0x00	.....	0x00	0x04	0x01

2. if finger is on sensor and captured image is good, module then return "GD_NEED_RELEASE_FINGER"

3. Module return the result of verify response packet as follow

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x01	0x01	0x04	0x00	0x00	0x00	0xF4	0xFF	...	0x00	0xF8	0x02
0xAA	0x55	0x01	0x01	0x04	0x00	0x00	0x00	0x01	0x00	...	0x00	0x06	0x01

4.3.2 Identify

[Function] One-to-many match

The live scanning fingerprint matches to all templates stored in FLASH memory, and then respond the result.

[Operation Sequence]

1. if Template Data Base is null, result= ERR_ALL_TMPL_EMPTY;

2. detect finger whether press on sensor or not repeatedly;

if no any finger press on sensor in the period of timeout, result= ERR_TIME_OUT;

3. else check quality of the captured fingerprint image

if image is not good, result= ERR_BAD_QUALITY

4. else result=GD_NEED_RELEASE_FINGER, denote that lift finger

5. identify the captured fingerprint with the all template data in FLASH memory

if identify ok ,result=matched template No.; else result= ERR_IDENTIFY

6. In the period of process identify command, if module received “FP Cancel” command,

The module then stop identify command and return ACK that is ERR_FP_CANCEL

Please refer to appendix about the flow of Verify & Identify

[Command and Response]

PREFIX		0xAA55
CMD		0x0102
LEN		0
DATA		Null
CKS		Checksum
PREFIX		0x55AA
RCM		0x0102
LEN		4
RET		ERR_SUCCESS or ERR_FAIL
DATA	2byte	Success: GD_NEED_RELEASE_FINGER or Template No. Fail: Error Code is as follow

[Example of Identify Command]

		ERR_IDENTIFY ERR_ALL_TMPL_EMPTY ERR_TIME_OUT ERR_BAD_QUALITY
CKS		Checksum

① Host send identify command, command packet as follow

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x02	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x02	0x01

② if finger is on sensor and captured image is good, module return "GD_NEED_RELEASE_FINGER"

③ Module return the result of identify

②, ③response packet as follow

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x02	0x01	0x04	0x00	0x00	0x00	0xF4	0xFF	...	0x00	0xF9	0x02
0xAA	0x55	0x02	0x01	0x04	0x00	0x00	0x00	0x01	0x00	...	0x00	0x07	0x01

4.3.3 Enroll

[Function] Enroll

In the process of enroll, The same finger must be press on the sensor for 3 times, each time module get template temporary and storage in RAM, if the three templates are correct, the module generalize the three templates to one template then write to Flash memory.

[Operation Sequence]

1 if the appoint template No. is invalid, result= ERR_INVALID_TMPL_NO;

2 if the template No. have existed template data, result=ERR_TMPL_NOT_EMPTY;

3 else result =GD_NEED_FIRST_SWEEP, denote that press finger for the first time;

4 detect finger whether press on sensor or not repeatedly,

if no finger press on sensor in the period of timeout, result=ERR_TIME_OUT;

5 else check quality of captured finger image,

if image is no good, result=ERR_BAD_QUALITY

6 else result=GD_NEED_RELEASE_FINGER denote that lift finger, after finger release then go to next steep;

7 result=GD_NEED_SECOND_SWEEP denote that press the same finger for the second time, and then go to step 4, 5

8 if the second input fingerprint is correct,

result = GD_NEED_RELEASE_FINGER denote that lift finger,

after finger release then go to next steep;

9 result=GD_NEED_THIRD_SWEEP denote that press the same finger for the third time

and then go to step 4, 5

10 if the third input fingerprint is correct,

result=GD_NEED_RELEASE_FINGER denote that lift finger;

11 the module generalize the three templates to one template,

success go to steep12, fail result=ERR_GENERALIZE;

12 if Duplication Check=OFF, storage the template data and return result=Template No;

13 if Duplication Check=ON, the template data match to all template to check whether

exist duplicated fingerprint or not. if yes, result = ERR_DUPLICATION_ID;

else result = Template No. and storage the template data;

14 In the period of process ENROLL command, if module received “FP Cancel” command,

the module then stop ENROLL command and return ACK that is ERR_FP_CANCEL;

Thaieasyelec
enable your design

Please refer to appendix about the flow of Enroll

[Command and Response]

PREFIX		0xAA55
CMD		0x0103
LEN		2
DATA		Template No. that enroll
CKS		Checksum
PREFIX		0x55AA
RCM		0x0103
LEN		4/6
RET		ERR_SUCCESS or ERR_FAIL
DATA	2byte	Success: GD_NEED_FIRST_SWEEP GD_NEED_SECOND_SWEEP GD_NEED_THIRD_SWEEP GD_NEED_RELEASE_FINGER or Template No. Fail: Error Code is as follow ERR_INVALID_TMPL_NO ERR_TMPL_NOT_EMPTY ERR_TIME_OUT ERR_BAD_QUALITY ERR_GENERALIZE
	2byte	Null or ERR_DUPLICATION_ID
CKS		Checksum

[Example of Enroll Command]
Enroll to Template No.=1, Command Packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x03	0x01	0x02	0x00	0x01	0x00	.....	0x00	0x06	0x01

Response Packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x03	0x01	0x04	0x00	0x00	0x00	0xF1	0xFF	...	0x00	0xF7	0x02
0xAA	0x55	0x03	0x01	0x04	0x00	0x00	0x00	0xF4	0xFF	...	0x00	0xFA	0x02
0xAA	0x55	0x03	0x01	0x04	0x00	0x00	0x00	0xF2	0xFF	...	0x00	0xF8	0x02
0xAA	0x55	0x03	0x01	0x04	0x00	0x00	0x00	0xF4	0xFF	...	0x00	0xFA	0x02
0xAA	0x55	0x03	0x01	0x04	0x00	0x00	0x00	0xF3	0xFF	...	0x00	0xF9	0x02
0xAA	0x55	0x03	0x01	0x04	0x00	0x00	0x00	0xF4	0xFF	...	0x00	0xFA	0x02
0xAA	0x55	0x03	0x01	0x06	0x00	0x00	0x00	0x01	0x00	...	0x00	0x0A	0x01

4.3.4 Enroll One Time

[Function] Enroll One Time

Enroll command require the same finger press on the sensor for 3 times, corresponding

Enroll One Time command require the finger press on sensor for one time only

[Operation Sequence]

1 if the appoint template No. is invalid, result= ERR_INVALID_TMPL_NO;

2 if the template No. have existed template data, result=ERR_TMPL_NOT_EMPTY;

3 detect finger whether press on sensor or not repeatedly,

if no finger press on sensor in the period of timeout, result=ERR_TIME_OUT;

4 else check quality of captured finger image,

if image is no good, result=ERR_BAD_QUALITY;

5 else result=GD_NEED_RELEASE_FINGER denote that lift finger;

6 if Duplication Check=OFF, storage the template data and return result=Template No;

7 if Duplication Check=ON, the template data match to all template to check whether

exist duplicated fingerprint or not .Yes, result = ERR_DUPLICATION_ID;

else result = Template No. and storage the template data

8 In the period of process Enroll One Time command, if module received “FP Cancel”,

the module then stop the command and return ACK that is ERR_FP_CANCEL;

Notice:

we recommend using Enroll command, disapproval using Enroll one time command

[Command and Response]

PREFIX	0xAA55
CMD	0x0104
LEN	2
DATA	Template No. that enroll
CKS	Checksum

PREFIX	0x55AA
RCM	0x0104
LEN	4/6
RET	ERR_SUCCESS or ERR_FAIL

DATA	2byte	Success: GD_NEED_RELEASE_FINGER / Template No. Fail: Error Code is as follow ERR_INVALID_TMPL_NO ERR_TMPL_NOT_EMPTY ERR_TIME_OUT ERR_BAD_QUALITY
	2byte	Null or ERR_DUPLICATION_ID
CKS		Checksum

[Example of Enroll One Time]

Enroll to Template No.=1,Enroll One Time Command packet is as follow

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x04	0x01	0x02	0x00	0x01	0x00	.....	0x00	0x07	0x01

Response Packet is as follow

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x04	0x01	0x04	0x00	0x00	0x00	0xF4	0xFF	...	0x00	0xFB	0x02
0xAA	0x55	0x04	0x01	0x04	0x00	0x00	0x00	0x01	0x00	...	0x00	0x09	0x01

4.3.5 Clear Template

[Function] Delete specified template data

Delete template data with specified ID from database. after this command is executed, specified template data are deleted immediately.

[Operation Sequence]

1 if the appoint template No. is invalid, result= ERR_INVALID_TMPL_NO

2 if the appoint template No. is inexistence template data, result=ERR_TMPL_EMPTY

3 else delete specified template data and then return response packet

[Command and Response]

PREFIX	0xAA55
CMD	0x0105
LEN	2
DATA	Template No. to delete
CKS	Checksum

PREFIX		0x55AA
RCM		0x0105
LEN		4
RET		ERR_SUCCESS or ERR_FAIL
DATA	2byte	Success: Template No. to be deleted Fail: Error Code is as follow ERR_INVALID_TMPL_NO ERR_TMPL_EMPTY
CKS		Checksum

[Example of Clear Template]

Clear Template No.=1 command packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x05	0x01	0x02	0x00	0x01	0x00	.....	0x00	0x08	0x01

Response packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x05	0x01	0x04	0x00	0x00	0x00	0x01	0x00	...	0x00	0x0A	0x01

4.3.6 Clear All Template

[Function] Clear All Template

Delete all template data in database. After this command is executed, all fingerprint template data are deleted immediately.

[Command and Response]

PREFIX		0xAA55
CMD		0x0106
LEN		0
DATA		Null
CKS		Checksum
PREFIX		0x55AA
RCM		0x0106
LEN		4
RET		ERR_SUCCESS or ERR_FAIL
DATA	2byte	Success: Total number of deleted template Fail: Error code
CKS		Checksum

[Example of Clear All Template]

Host sends Clear All Template Command Packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x06	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x06	0x01

Response Packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x06	0x01	0x04	0x00	0x00	0x00	0x01	0x00	...	0x00	0x0B	0x01

4.3.7 Get Empty ID

[Function] Get Empty ID

Get the first number that can be used for storage fingerprint template

[Operation Sequence]

Search the first number that can be used for storage fingerprint template,

if all fingerprint data base is full, result= ERR_EMPTY_ID_NOEXIST;

else result=template No. that can be utilized

[Command and Response]

PREFIX		0xAA55
CMD		0x0107
LEN		0
DATA		Null
CKS		Checksum

PREFIX		0x55AA
RCM		0x0107
LEN		4
RET		ERR_SUCCESS or ERR_FAIL
DATA	2byte	Success: template No. that can be utilized Fail: ERR_EMPTY_ID_NOEXIST
CKS		Checksum

[Example of Get Empty ID]

Command packet:

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x07	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x07	0x01

Response Packet:

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x07	0x01	0x04	0x00	0x00	0x00	0x02	0x00	...	0x00	0x0D	0x01

4.3.8 Get Template Status

[Function] Check the specified Template No. whether can be utilized or not.

[Command and Response]

PREFIX		0xAA55
CMD		0x0108
LEN		2
DATA		Template No.
CKS		Checksum
PREFIX		0x55AA
RCM		0x0108
LEN		4
RET		ERR_SUCCESS or ERR_FAIL
DATA	2byte	Success: GD_TEMPLATE_NOT_EMPTY GD_TEMPLATE_EMPTY Fail: ERR_INVALID_TMPL_NO
CKS		Checksum

[Example of Get Template Status]

Get template status that No.=1,command packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x08	0x01	0x02	0x00	0x01	0x00	.....	0x00	0x0B	0x01

Response Packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x08	0x01	0x04	0x00	0x00	0x00	0x01	0x00	...	0x00	0x0D	0x01

4.3.9 Get Broken Template

[Function] Check template Data Base integrality

Check fingerprint template Data base whether is damage or not. Some unit of FLASH memory may be damaged by chance failure. For the broken template data, you can delete the template and then enroll again.

[Operation Sequence]

If exist broken template data, result=total number of broken template + template No.

else total number=0,Template No.=0

[Command and Response]

PREFIX		0xAA55
CMD		0x0109
LEN		0
DATA		Null
CKS		Checksum

PREFIX		0x55AA
RCM		0x0109
LEN		6
RET		ERR_SUCCESS or ERR_FAIL
DATA	D0, D1	Success: Total number of broken template 0 denote there is no any template are damaged Fail: Error Code
	D2, D3	The first template No. of broken template 0 denote there is no any template are damaged
CKS		Checksum

[Example of Get Broken Template]

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x09	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x09	0x01

Response Packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x09	0x01	0x06	0x00	0x00	0x00	0x00	0x00	...	0x00	0x0F	0x01

4.3.10 Read Template

[Function] Read fingerprint Template data with specified Template No. from the module

[Operation Sequence]

1 if the appoint template No. is invalid, result= ERR_INVALID_TMPL_NO

2 if the appoint template No. is inexistence template data, result=ERR_TMPL_EMPTY

3 else result= (Template Record Size + 2), denote that length of the data field of Response data packet

4 utilize Response data packet to transmit the template data

[Command and Response]

PREFIX	0xAA55
CMD	0x010A
LEN	2
DATA	Template No.
CKS	Checksum

PREFIX	0x55AA
RCM	0x010A
LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	Success: (Template Record Size + 2) Fail: Error Code
CKS	Checksum
Response Data Packet	
PREFIX	0x5AA5
RCM	0x010A
LEN	Template Record Size + 4
RET	ERR_SUCCESS
DATA	Template No.(2byte) + Template Record Data
CKS	Checksum

[Example of Read Template]
Read Template Command Packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x0A	0x01	0x02	0x00	0x01	0x00	.....	0x00	0x0D	0x01

Response and Response Data Packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x0A	0x01	0x04	0x00	0x00	0x00	0xF4	0x01	...	0x00	0x03	0x02
0xA5	0x5A	0x0A	0x01	0xF6	0x01	0x00	0x00	0x01	0x00	498 Bytes Template Data		CKS	

4.3.11 Write Template

[Function]

Download fingerprint template data with specified ID number from host to module, then write to module's fingerprint template Database

[Operation Sequence]

Host send Write Template command to cause module wait for receive Command Data Packet to get template data from Host

1 Module checks the Command packet whether is correct or not

if size of Template record is incorrectness, result=ERR_INVALID_PARAM

else return response packet and prepare receive template data (Command Data Packet)

2 Host send Command Data Packet with template No. and Template Data

3 after receive Command Data Packet is successful,

if the appoint template No. is invalid, result= ERR_INVALID_TMPL_NO

if Checksum of Template Data is incorrectness, result=ERR_INVALID_PARAM

4 else Template Data that received write to Flash Memory

[Command and Response]

Command Packet and Response		
PREFIX		0xAA55
CMD		0x010B
LEN		2
DATA		Template Record Size
CKS		Checksum
PREFIX		0x55AA
RCM		0x010B
LEN		4
RET		ERR_SUCCESS or ERR_FAIL
DATA	2byte	Success：0 Fail: ERR_INVALID_PARAM
CKS		Checksum
Command Data Packet and Response		

PREFIX	0xA55A
CMD	0x010B
LEN	Template Record Size + 2
DATA	Template No.(2byte) + Template Record Data
CKS	Checksum

PREFIX		0x5AA5
RCM		0x010B
LEN		4
RET		ERR_SUCCESS or ERR_FAIL
DATA	2byte	Success: Template No. Fail: Error Code
CKS		Checksum

[Example of Write Template]

1 Host send Write Template command packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x0B	0x01	0x02	0x00	0xF2	0x01	.....	0x00	0x00	0x02

2 Response to the write template command

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x0B	0x01	0x04	0x00	0x00	0x00	0x00	0x00	...	0x00	0x0F	0x01

3 Host send Command Data Packet with Template No. and Template Data

PREFIX		CMD		LEN		DATA			CKS
0x5A	0xA5	0x0B	0x01	0xF4	0x01	0x01	0x00	498Bytes Template Data	CKS

4 After check the command data packet is correct, module write the template data to

Flash memory, and then response the command data packet

PREFIX		RCM		LEN		RET		DATA		CKS	
0xA5	0x5A	0x0B	0x01	0x04	0x00	0x00	0x00	0x01	0x00	0x10	0x01

4.3.12 Set Security Level

[Function] Set Security Level

Set up the threshold of fingerprint identification engine, Integer of 1-5 can be selected,

one is the lowest identification level and five is the highest identification level, Default is three

[Operation Sequence]

1 if value of the security level is invalid, result=ERR_INVALID_SEC_VAL

2 else update the value of Security Level, then response the command

[Security Level and Fingerprint Identification precision]

Security Level	Value of FAR & FRR	
Level 1	FAR (False Acceptance Rate)	0.01%
	FRR (False Rejection Rate)	0.005%
Level 2	FAR (False Acceptance Rate)	0.003%
	FRR (False Rejection Rate)	0.01%
Level 3	FAR (False Acceptance Rate)	0.001 %
	FRR (False Rejection Rate)	0.1 %
Level 4	FAR (False Acceptance Rate)	0.0003%
	FRR (False Rejection Rate)	0.5%
Level 5	FAR (False Acceptance Rate)	0.0001%
	FRR (False Rejection Rate)	1%

[Command and Response]

PREFIX	0xAA55
CMD	0x010C
LEN	2
DATA	Value of Security Level
CKS	Checksum

PREFIX	0x55AA
RCM	0x010C
LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	Success: The Value of Security Level Fail: ERR_INVALID_SEC_VAL
CKS	Checksum

[Example of Set Security Level]

Set Security Level command packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x0C	0x01	0x02	0x00	0x03	0x00	.....	0x00	0x11	0x01

Set Security Level command response packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x0C	0x01	0x04	0x00	0x00	0x00	0x03	0x00	...	0x00	0x13	0x01

4.3.13 Get Security Level

[Function]

Host read the value of Security Level from module

[Command and Response]

PREFIX	0xAA55
CMD	0x010D
LEN	0
DATA	Null
CKS	Checksum

PREFIX	0x55AA
RCM	0x010D
LEN	4
RET	ERR_SUCCESS
DATA	Value of Security Level
CKS	Checksum

[Example of Get Security Level]

Get Security Level command packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x0D	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x0D	0x01

Get Security Level command response packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x0D	0x01	0x04	0x00	0x00	0x00	0x03	0x00	...	0x00	0x14	0x01

4.3.14 Set Finger Time Out

[Function]

Verify, Identify, Enroll, Enroll One Time, Enroll And Store in RAM,

Get Feature Data of Captured FP, Verify Downloaded Feature with Captured FP,

Identify Downloaded Feature with Captured FP, Identify Free

In the period of above command executing, the parameter of the Finger Time-out

is the time limit of detect finger on sensor repeatedly 0-60s can be selected, Default is 5s

[Operation Sequence]

1 if the value of Time-out is out-off range, result=ERR_INVALID_TIME_OUT

2 else update the value of Time-out and response the command

[Command and Response]

PREFIX	0xAA55
CMD	0x010E
LEN	2
DATA	Value of Time Out
CKS	Checksum

PREFIX	0x55AA
RCM	0x010E
LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	Value of Time Out or ERR_INVALID_TIME_OUT
CKS	Checksum

[Example of Set Finger Time-out]

Set Finger Time-out command packet

PREFIX	CMD	LEN	DATA	CKS
0x55 0xAA	0x0E 0x01	0x02 0x00	0x00 0x00 ..... 0x00	0x1A 0x01

Command response packet

PREFIX	RCM	LEN	RET	DATA	CKS
0xAA 0x55	0x0E 0x01	0x04 0x00	0x00 0x00	0x0A 0x00 ... 0x00	0x1C 0x01

4.3.15 Get Finger Time-out

[Function] Read the value of Finger Time-out

[Command and Response]

PREFIX	0xAA55
CMD	0x010F
LEN	0
DATA	Null
CKS	Checksum

PREFIX	0x55AA
RCM	0x010F
LEN	4
RET	ERR_SUCCESS
DATA	Value of Time Out
CKS	Checksum

[Example of Get Finger Time-out]

Command packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x0F	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x0F	0x01

Response packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x0F	0x01	0x04	0x00	0x00	0x00	0x05	0x00	...	0x00	0x18	0x01

4.3.16 Set Device ID

[Function] Set the Device ID number, 1-254 can be selected, Default is 1

[Operation Sequence]

1 if the value is out-off range, result=ERR_INVALID_PARAM

2 else update the value of Device ID and response the command

[Command and Response]

PREFIX	0xAA55
CMD	0x0110
LEN	2
DATA	Device ID
CKS	Checksum

PREFIX	0x55AA
RCM	0x0110
LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	Device ID or ERR_INVALID_PARAM
CKS	Checksum

[Example of Set Device ID]

Command Packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x10	0x01	0x02	0x00	0x01	0x00	.....	0x00	0x13	0x01

Response Packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x10	0x01	0x04	0x00	0x00	0x00	0x01	0x00	...	0x00	0x15	0x01

4.3.17 Get Device ID

[Function] Read Device ID of the module

[Command and Response]

PREFIX	0xAA55
CMD	0x0111
LEN	0
DATA	Null
CKS	Checksum

PREFIX	0x55AA
RCM	0x0111
LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	Device ID or Error Code
CKS	Checksum

[Example of Get Device ID]

Command Packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x11	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x11	0x01

Response packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x11	0x01	0x04	0x00	0x00	0x00	0x01	0x00	...	0x00	0x16	0x01

4.3.18 Get F/W Version

[Function] Get Firmware Version of the Module

[Command and Response]

PREFIX		0xAA55
CMD		0x0112
LEN		0
DATA		Null
PREFIX		0x55AA
RCM		0x0112
LEN		4
RET		ERR_SUCCESS
DATA	D0	Version Major
	D1	Version Minor

[Example]

Command Packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x12	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x12	0x01

Response packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x12	0x01	0x04	0x00	0x00	0x00	0x02	0x09	...	0x00	0x0D	0x01

4.3.19 Finger Detect

[Function] Detect whether finger press on sensor or not

[Command and Response]

PREFIX	0xAA55
CMD	0x0113
LEN	0
DATA	Null
CKS	Checksum

PREFIX	0x55AA
RCM	0x0113
LEN	4
RET	ERR_SUCCESS
DATA	Result of detect: 1: Finger on sensor, 0: no finger on sensor
CKS	Checksum

Notice:

Host need send Sensor LED Control enable command to power on LED before Finger Detect command; otherwise the result of Finger Detect is incorrect

[Example]

Detect Finger command packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x13	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x13	0x01

Response Packet of Finger detect

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x13	0x01	0x04	0x00	0x00	0x00	0x01	0x00	...	0x00	0x18	0x01

4.3.20 Set Baud Rate

[Function] Set UART Baud Rate

[Command and Response]

PREFIX	0xAA55
CMD	0x0114
LEN	2
DATA	Baud Rate Index : 1: 9600bps 2: 19200bps 3: 38400bps 4: 57600bps 5: 115200bps
PREFIX	0x55AA
RCM	0x0114
LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	Success: Baud Rate Index Fail: ERR_INVALID_BAUDRATE

Notice: New value is active only by reset or power on

[Example]

Set Baud Rate=9600BPS

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x14	0x01	0x02	0x00	0x01	0x00	.....	0x00	0x17	0x01

Response packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x14	0x01	0x04	0x00	0x00	0x00	0x01	0x00	...	0x00	0x19	0x01

4.3.21 Set Duplication Check (ON/OFF)

[Function]

Setup Enable/Disable fingerprint duplication check when execute Enroll or Enroll One Time command

[Command and Response]

PREFIX	0xAA55
CMD	0x0115
LEN	2
DATA	Status of duplication check (1:Enable ; 0:Disable)
CKS	Checksum

PREFIX	0x55AA
RCM	0x0115
LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	Success: 1/0 (status of duplication check) Fail: ERR_INVALID_DUP_VAL
CKS	Checksum

[Example]

Set duplication check = Enable

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x15	0x01	0x02	0x00	0x01	0x00	.....	0x00	0x18	0x01

Response Packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x15	0x01	0x04	0x00	0x00	0x00	0x01	0x00	...	0x00	0x1A	0x01

4.3.22 Get Duplication Check

[Function] Get status of Duplication Check

[Command and Response]

PREFIX	0xAA55
CMD	0x0116
LEN	0
DATA	Null
CKS	Checksum

PREFIX	0x55AA
RCM	0x0116
LEN	4
RET	ERR_SUCCESS
DATA	Status of duplication check currently 1: Enable; 0: Disable
CKS	Checksum

[Example]

Get status of Duplication Check

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x16	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x16	0x01

Response Packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x16	0x01	0x04	0x00	0x00	0x00	0x01	0x00	...	0x00	0x1B	0x01

4.3.23 Enter Standby Mode

[Function] Put module into standby mode

Only reset or power on will lead module from standby mode to active mode

[Sequence]

1 Module enter into Standby Mode and result=ERR_SUCCESS。

2 From standby mode to active mode only by RESET or Power ON

[Command and Response]

PREFIX	0xAA55
CMD	0x0117
LEN	0
DATA	Null
CKS	Checksum

PREFIX	0x55AA
RCM	0x0117
LEN	2
RET	ERR_SUCCESS
DATA	Null
CKS	Checksum

Notice: Before power off module, enter Standby Mode Command is recommended

[Example]

Enter Standby Mode

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x17	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x17	0x01

Response Packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x17	0x01	0x04	0x00	0x00	0x00	0x01	0x00	...	0x00	0x0B	0x01

4.3.24 Enroll And Store in RAM

[Function]

The same as “Enroll” command, exclusive difference is “Enroll” command store template data into FLASH memory, but “Enroll And Store in RAM” command store template data into RAM temporarily, host can utilize “Get Enroll Data” command acquire template data.

[Sequence]

1 else result =GD_NEED_FIRST_SWEEP, denote that press finger for the first time;

2 detect finger whether press on sensor or not repeatedly, if no finger press on sensor in the period of timeout, result=ERR_TIME_OUT;

3 else check quality of captured finger image, if image is no good, result=ERR_BAD_QUALITY

4 else result=GD_NEED_RELEASE_FINGER denote that lift finger, after finger release then go to next step;

5 result=GD_NEED_SECOND_SWEEP denote that press the same finger for the second time, and then go to step2,3

6 if the second input fingerprint is correct, result=GD_NEED_RELEASE_FINGER denote that lift finger, after finger release then go to next step;

7 result=GD_NEED_THIRD_SWEEP denote that press the same finger for the third time and then go to step2,3

8 if the third input fingerprint is correct, result=GD_NEED_RELEASE_FINGER denote that lift finger;

9 the module generalize the three templates to one template, success go to steep 10, fail result=ERR_GENERALIZE;

10 result=0 and storage the template data into RAM;

11 In the period of process the command, if module received “FP Cancel” commands, the module then stop this command and return ACK that is ERR_FP_CANCEL;

Please refer to appendix about the flow of Enroll

[Command and Response]

PREFIX	0xAA55
CMD	0x0118
LEN	0
DATA	Null
CKS	Checksum
PREFIX	0x55AA
RCM	0x0118
LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	Success: GD_NEED_FIRST_SWEEP/GD_NEED_SECOND_SWEEP/ or GD_NEED_THIRD_SWEEP/GD_NEED_RELEASE_FINGER/0 Fail: ERR_TIME_OUT or ERR_BAD_QUALITY or ERR_GENERALIZE
CKS	Checksum

[Example]

Enroll And Store in RAM command packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x18	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x18	0x01

Response Packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x18	0x01	0x04	0x00	0x00	0x00	0xF1	0xFF	...	0x00	0x0C	0x03
0xAA	0x55	0x18	0x01	0x04	0x00	0x00	0x00	0xF4	0xFF	...	0x00	0x0F	0x03
0xAA	0x55	0x18	0x01	0x04	0x00	0x00	0x00	0xF2	0xFF	...	0x00	0x0D	0x03
0xAA	0x55	0x18	0x01	0x04	0x00	0x00	0x00	0xF4	0xFF	...	0x00	0x0F	0x03
0xAA	0x55	0x18	0x01	0x04	0x00	0x00	0x00	0xF3	0xFF	...	0x00	0x0E	0x03
0xAA	0x55	0x18	0x01	0x04	0x00	0x00	0x00	0xF4	0xFF	...	0x00	0x0F	0x03
0xAA	0x55	0x18	0x01	0x04	0x00	0x00	0x00	0x00	0x00	...	0x00	0x1C	0x01

4.3.25 Get Enroll Data

[Function] Get template data after execute the "Enroll and Store in RAM" command

This command is the same as "Read Template" command, refer to "Read Template"

[Command and Response]

PREFIX	0xAA55
CMD	0x0119
LEN	0
DATA	Null
CKS	Checksum

PREFIX	0x55AA
RCM	0x0119
LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	Success: Template Record Size indicate the length of data field in Response Data Packet Fail: Error Code
CKS	Checksum

Response Data Packet	
PREFIX	0x5AA5
RCM	0x0119
LEN	Template Record Size + 2
RET	ERR_SUCCESS
DATA	Template Record Data
CKS	Checksum

[Example of Get Enroll Data]

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x19	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x19	0x01

Response Packet and Response Data Packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x19	0x01	0x04	0x00	0x00	0x00	0xF2	0x01	...	0x00	0x10	0x02
0xA5	0x5A	0x19	0x01	0xF4	0x01	0x00	0x00	498Bytes Template Data				CKS	

4.3.26 Get Feature Data of Captured FP

[Function] Get template data when captured a fingerprint image

This command is equivalent “Enroll One Time” + “Get Enroll Data” command

[Sequence]

After module have received the “Get Feature Data of Captured FP” command,

Module detect finger continually

1 if no any finger on sensor in the period detect finger, result=ERR_TIME_OUT;

2 check the quality of captured fingerprint image, if the image is not good, result=ERR_BAD_QUALITY;

3 else acquire the template data and upload to host utilize Response data packet

4 In the period of process the command, if module received “FP Cancel” commands, the module then stop this command and return ACK that is ERR_FP_CANCEL;

[Command and Response]

PREFIX	0xAA55
CMD	0x011A
LEN	0
DATA	Null
CKS	Checksum
PREFIX	0x55AA
RCM	0x011A
LEN	4
RET	ERROR_SUCCESS or ERR_FAIL
DATA	Success: Template Record Size Fail: ERR_TIME_OUT or ERR_BAD_QUALITY/
CKS	Checksum
Response Data Packet	
PREFIX	0x5AA5
RCM	0x011A
LEN	Template Record Size + 2
RET	ERR_SUCCESS

DATA	Template Record Data
CKS	Checksum

[Example]
Get Feature Data of Capture FP

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	01A	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x1A	0x01

Response packet and Response Data Packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x1A	0x01	0x04	0x00	0x00	0x00	0xF2	0x01	...	0x00	0x11	0x02
0xA5	0x5A	0x1A	0x01	0xF4	0x01	0x00	0x00	498Bytes Template Data				CKS	

4.3.27 Verify Downloaded Feature With Captured FP

[Function] Verify downloaded template data with captured fingerprint

This command is equivalent “Write Template Data” and “Verify” command

[Sequence]

1 Host send this command packet cause module wait for receive Command Data Packet to get template data from Host.

Host set length of template data in the data field of command packet

2 Module return response packet to inform host that module have get ready for receive template data packet.

3 Host send command data packet with template data to module

4 After module received the template data successful, module detect finger continually

5 if no any finger on sensor in the period detect finger, result=ERR_TIME_OUT;

6 check the quality of captured fingerprint image, if the image is not good, result=ERR_BAD_QUALITY.

7 else verify and then response the result of verify

8 In the period of process the command, if module received “FP Cancel” commands, the module then stop this command and return ACK that is ERR_FP_CANCEL

[Command and Response]

Command Packet	
PREFIX	0xAA55
CMD	0x011B
LEN	2
DATA	Template Record Size
CKS	Checksum
PREFIX	0x55AA
RCM	0x011B
LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	Success:0; Fail: Error Code
CKS	Checksum
Command Data Packet	
PREFIX	0xA55A
CMD	0x011B
LEN	Template Record Size
DATA	Template Record Data
CKS	Checksum
PREFIX	0x5AA5
RCM	0x011B
LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	Success:0 ; Fail: Error Code
CKS	Checksum

[Example]

1 Host send verify downloaded feature data with captured FP command packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x1B	0x01	0x02	0x00	0xF2	0x01	.....	0x00	0x10	0x02

2 Module return response packet to host

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x1B	0x01	0x04	0x00	0x00	0x00	0x00	0x00	...	0x00	0x1F	0x01

3 Host download template data to module

PREFIX		CMD		LEN		DATA	CKS
0x5A	0xA5	0x1B	0x01	0xF2	0x01	498Bytes Template Data	CKS

4 Module detect finger then verify and response the result

PREFIX		RCM		LEN		RET		DATA		CKS	
0xA5	0x5A	0x1B	0x01	0x04	0x00	0x00	0x00	0x00	0x00	0x1F	0x01

4.3.28 Identify Downloaded Feature with Captured FP

[Function] Download 2 templates data and identify with captured fingerprint

This command is equivalent “Write Template Data” 2 times and “Identify” command

[Sequence]

1 Host send this command packet cause module wait for receive Command Data Packet to get template data from Host.

Host set length of template data in the data field of command packet

2 Module return response packet to inform host that module have get ready for receive the first template data packet.

3 Host send command data packet with the first template data to module

4 Module return response packet with result= GD_DOWNLOAD_SUCCESS, inform host waiting for the next template data.

5 Host send command data packet with the second template data to module

6 After module received the 2 templates data successful, module detect finger continually

7 if no any finger on sensor in the period detect finger, result=ERR_TIME_OUT;

8 check the quality of captured fingerprint image, if the image is not good, result=ERR_BAD_QUALITY.

9 else identify the 2 template’s data with captured fingerprint and then response result of identify

10 In the period of process the command, if module received “FP Cancel” commands, the module then stop this command and return ACK that is ERR_FP_CANCEL

[Command and Response]

Command packet	
PREFIX	0xAA55
CMD	0x011C
LEN	2
DATA	Template Record Size
PREFIX	0x55AA
RCM	0x011C
LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	Success: 0; Fail: Error Code
Command Data packet	
PREFIX	0xA55A
CMD	0x011C
LEN	Template Record Data + 2
DATA	Template Index(2Byte) + Template Record Data
PREFIX	0x5AA5
RCM	0x011C
LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	Success: GD_DOWNLOAD_SUCCESS; Fail: Error Code
PREFIX	0xA55A
CMD	0x011C
LEN	Template Record Data + 2
DATA	Template Index(2Byte) + Template Record Data
PREFIX	0x5AA5
RCM	0x011C

LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	Success：0; Fail: Error Code

[Example]

1 Host send Identify Downloaded Feature With Captured FP command packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x1C	0x01	0x02	0x00	0xF2	0x01	.....	0x00	0x11	0x02

2 Module return response packet to host

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x1C	0x01	0x04	0x00	0x00	0x00	0x00	0x00	...	0x00	0x20	0x01

3 Host send the first template data to module

PREFIX		CMD		LEN		DATA			CKS
0x5A	0xA5	0x1C	0x01	0xF4	0x01	0x01	0x00	498Byte Template Data	CKS

4 Module request the next template data

PREFIX		RCM		LEN		RET		DATA		CKS	
0xA5	0x5A	0x1C	0x01	0x04	0x00	0x00	0x00	0xA1	0x00	0xC1	0x01

5 Host send the second template data to module

PREFIX		CMD		LEN		DATA			CKS
0x5A	0xA5	0x1C	0x01	0xF4	0x01	0x02	0x00	498Bytes Template Data	CKS

6 Module detect finger then identify and response the result

PREFIX		RCM		LEN		RET		DATA		CKS	
0xA5	0x5A	0x1C	0x01	0x04	0x00	0x00	0x00	0x00	0x00	0x20	0x01

4.3.29 Get Device Name

[Function] Read Device name of module

[Command and Response]

PREFIX	0xAA55
CMD	0x0121
LEN	0
DATA	Null
CKS	Checksum

PREFIX	0x55AA
RCM	0x0121
LEN	16
RET	ERR_SUCCESS or ERR_FAIL
DATA	Success: “STO20-OEM” Fail: Error Code
CKS	Checksum

[Example]

Get Device Name command packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x21	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x21	0x01

Response Packet

PREFIX		RCM		LEN		RET		DATA	CKS
0xAA	0x55	0x21	0x01	0x10	0x00	0x00	0x00	Device Name in ASCII	CKS

4.3.30 Sensor LED Control

[Function] ON/OFF LED of fingerprint sensor

[Command and Response]

PREFIX	0xAA55
CMD	0x0124
LEN	2
DATA	Sensor LED status（1:ON， 0:OFF）
CKS	Checksum

PREFIX	0x55AA
RCM	0x0124
LEN	4
RET	ERR_SUCCESS
DATA	0
CKS	Checksum

[Example]

Sensor LED ON command packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x24	0x01	0x02	0x00	0x01	0x00	.....	0x00	0x27	0x01

Response Packet

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x24	0x01	0x04	0x00	0x00	0x00	0x00	0x00	...	0x00	0x28	0x01

4.3.31 Identify Free

[Function]

The command cause module detect finger then identify and return result continually still received FP Cancel command



[Sequence]

1 if no any template data, result=ERR_ALL_TMPL_EMPTY

2 Detect finger continually

3 Check quality of fingerprint image, if image is no good result=ERR_BAD_QUALITY.

4 else image is good, result=GD_NEED_RELEASE_FINGER

5 identify and return the result

if identify OK result=ERR_SUCCESS + Template No.;

else result=ERR_FAIL + ERR_IDENTIFY

6 go to step2 until FP Cancel command

7 if received FP Cancel command, stop identify free command and return ERR_FP_CANCEL

[Command and Response]

PREFIX	0xAA55
CMD	0x0125
LEN	0
DATA	Null
CKS	Checksum

PREFIX		0x55AA
RCM		0x0125
LEN		4
RET		ERR_SUCCESS or ERR_FAIL
DATA	2byte	Success: GD_NEED_RELEASE_FINGER / Template No. Fail: ERR_ALL_TMPL_EMPTY ERR_BAD_QUALITY ERR_IDENTIFY ERR_NO_RELEASE
CKS		Checksum

[Example]

Host send Identify Free command packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x25	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x25	0x01

Module response the result: GD_NEED_RELEASE_FINGER and

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x25	0x01	0x04	0x00	0x00	0x00	0xF4	0xFF	...	0x00	0x1C	0x03
0xAA	0x55	0x25	0x01	0x04	0x00	0x00	0x00	0x01	0x00	...	0x00	0x2A	0x01

4.3.32 Set Device Password

[Function] Set password of communication between host and module

Default setting is null, all command can be executed, and verify password is needless.

Password is composed by 14bytes ASCII code, less than 14byte will report error

Password is authentication by Verify Device Password command

If new password is setup successful, all command is invalid unless “Verify Device Password” is successful. But “Test Connection” and “Verify Device Password” command is valid

[Command and Response]

PREFIX	0xAA55
CMD	0x0126
LEN	14
DATA	14 Bytes password (form by ASCII Code)
CKS	Checksum

PREFIX	0x55AA
RCM	0x0126
LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	Success: 0 Fail: Error Code
CKS	Checksum

[Example]

Host send “Set Device Password” command packet

PREFIX		CMD		LEN		DATA	CKS
0x55	0xAA	0x26	0x01	0x0E	0x00	14Bytes ASCII Code	CKS

Module response the result of “Set Device Password”

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x26	0x01	0x04	0x00	0x00	0x00	0x00	0x00	...	0x00	0x2A	0x01

4.3.33 Verify Device Password

[Function] Verify password between host and module

Device Password is null by Default setting and all command is valid, verify device password command is needless.

If device's new password is setup, ever time power on the device from power down, the module is safeguard by password, all command except is invalid (Result=ERR_NOT_AUTHORIZED) until verify password is successful, but "Verify Device Password" and "Test Connection" command is valid in any time.

[Sequence]

1 if verify device password is OK, result= ERR_SUCCESS, all command is valid

2 else result= ERR_NOT_AUTHORIZED, module is safeguard by password

[Command and Response]

PREFIX	0xAA55
CMD	0x0127
LEN	14
DATA	14 Bytes password (form by ASCII code)
CKS	Checksum

PREFIX	0x55AA
RCM	0x0127
LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	0 / ERR_NOT_AUTHORIZED
CKS	Checksum

[Example]

Host send Verify Device Password command packet

PREFIX		CMD		LEN		DATA	CKS
0x55	0xAA	0x27	0x01	0x0E	0x00	14Bytes password form by ASCII	CKS

Module response the result of verify device password

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x27	0x01	0x04	0x00	0x00	0x00	0x00	0x00	...	0x00	0x2B	0x01

4.3.34 Get Enroll Count

[Function] Get total number of fingerprint template that have enrolled

[Command and Response]

PREFIX	0xAA55
CMD	0x0128
LEN	0
DATA	-
CKS	Checksum

PREFIX	0x55AA
RCM	0x0128
LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	Total number of template or Error Code
CKS	Checksum

[Example]

Host send Get Enroll Count

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x28	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x28	0x01

Module response result of get enroll count

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x28	0x01	0x04	0x00	0x00	0x00	0x01	0x00	...	0x00	0x2D	0x01

4.3.35 FP Cancel

[Function] Cancel current operation

1 In the period of process following command:

Verify

Identify

Enroll

Enroll One Time

Enroll and Store in RAM

Get Feature Data of Captured FP

Verify Downloaded Feature with Captured FP

Identify Downloaded Feature with Captured FP

Once received command of FP Cancel, stop the command in process immediately, then return 2 response packet:

One is the result=ERR_FP_CANCEL indicate current command have been cancelled.

The other result=ERR_SUCCESS denote that operation of cancel is successful.

2 for the other command except above ①, only return one response packet that is

Result= ERR_SUCCESS denote that operation of cancel is successful

[Command and Response]

PREFIX	0xAA55
CMD	0x0130
LEN	0
DATA	-
CKS	Checksum

PREFIX	0x55AA
RCM	0x0130
LEN	4
RET	ERR_SUCCESS
DATA	-
CKS	Checksum

[Example 1] Host sends FP Cancel commonly

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x30	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x30	0x01

Module response the result of cancel

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x30	0x01	0x04	0x00	0x00	0x00	0x00	0x00	...	0x00	0x34	0x01

[Example 2]:

In process of executing “Enroll” command, host send FP Cancel command

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x30	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x30	0x01

Module response two result as following

Result= ERR_FP_CANCEL denote that module have stop Enroll command

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x03	0x01	0x04	0x00	0x01	0x00	0x41	0x00	...	0x00	0x49	0x01

Result= ERR_SUCCESS denote that operation of cancel is successful

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x30	0x01	0x04	0x00	0x00	0x00	0x00	0x00	...	0x00	0x34	0x01

4.3.36 Test Connection

[Function] Test connection between host and module

[Command and Response]

PREFIX	0xAA55
CMD	0x0150
LEN	0
DATA	Null
CKS	Checksum

PREFIX	0x55AA
RCM	0x0150
LEN	4
RET	ERR_SUCCESS or ERR_FAIL
DATA	-
CKS	Checksum

[Example of Test Connection]

Host send Test Connection Command packet

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x50	0x01	0x00	0x00	0x00	0x00	.....	0x00	0x50	0x01

Module response connection is successful

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x50	0x01	0x04	0x00	0x00	0x00	0x00	0x00	...	0x00	0x54	0x01

4.3.37 Incorrect Command

[Function] Response to host that the command is incorrect by interference effect
[Command and Response]

PREFIX	0x55AA
RCM	0x0160
LEN	4
RET	ERR_SUCCESS
DATA	Null
CKS	Checksum

[Example]
Host send incorrect command

PREFIX		CMD		LEN		DATA				CKS	
0x55	0xAA	0x01	0x00	0x00	0x00	0x00	0x00	.....	0x00	0x00	0x01

Response the incorrect command

PREFIX		RCM		LEN		RET		DATA				CKS	
0xAA	0x55	0x60	0x01	0x04	0x00	0x00	0x00	0x00	0x00	...	0x00	0x64	0x01

5. Appendix

5.1 Response and Error Code

No.	Response and Error Code	Value	Description
1	ERR_SUCCESS	0x00	Successful for command execute
2	ERR_FAIL	0x01	Fail for command execute
3	ERR_VERIFY	0x11	One to one match fail
4	ERR_IDENTIFY	0x12	Identify fail, no matched template
5	ERR_TMPL_EMPTY	0x13	The appointed Template Data is Null
6	ERR_TMPL_NOT_EMPTY	0x14	Existed Template Data for the appointed ID
7	ERR_ALL_TMPL_EMPTY	0x15	All template is Null, Without enrolled Template
8	ERR_EMPTY_ID_NOEXIST	0x16	Without available Template ID.
9	ERR_BROKEN_ID_NOEXIST	0x17	Without damaged Template.
10	ERR_INVALID_TMPL_DATA	0x18	Appointed Template Data is invalid.
11	ERR_DUPLICATION_ID	0x19	The fingerprint has been enrolled.
12	ERR_BAD_QUALITY	0x21	Bad quality fingerprint image.
13	ERR_TIME_OUT	0x23	During Time Out period, no finger is detected
14	ERR_NOT_AUTHORIZED	0x24	Command is without authorization
15	ERR_GENERALIZE	0x30	Generalize Template Data fail
16	ERR_FP_CANCEL	0x41	Relative fingerprint command have been cancelled
17	ERR_INTERNAL	0x50	Internal Error
18	ERR_MEMORY	0x51	Memory Error
19	ERR_EXCEPTION	0x52	Firmware Error
20	ERR_INVALID_TMPL_NO	0x60	Template No. is invalid
21	ERR_INVALID_SEC_VAL	0x61	The Value of Security Level is invalid
22	ERR_INVALID_TIME_OUT	0x62	The Value of Time Out is invalid

23	ERR_INVALID_BAUDRATE	0x63	The Value of Baud Rate is invalid
24	ERR_DEVICE_ID_EMPTY	0x64	Not setting Device ID
25	ERR_INVALID_ DUP_VAL	0x65	Option Value of Duplication Check is invalid
26	ERR_INVALID_PARAM	0x70	Parameter is invalid
27	ERR_NO_RELEASE	0x71	In process of Identify Free command, Finger is not release
28	GD_DOWNLOAD_SUCCESS	0xA1	Download Template Record Data is successful
29	GD_NEED_FIRST_SWEEP	0xFFF1	Waiting input fingerprint for the first time.
30	GD_NEED_SECOND_SWEEP	0xFFF2	Waiting input fingerprint for the second time.
31	GD_NEED_THIRD_SWEEP	0xFFF3	Waiting input fingerprint for the third time.
32	GD_NEED_RELEASE_FINGER	0xFFF4	Lift finger
33	GD_DETECT_FINGER	0x01	There is an finger on sensor
34	GD_NO_DETECT_FINGER	0x00	There is no finger on sensor
35	GD_TEMPLATE_NOT_EMPTY	0x01	The appointed Template Data are not null
36	GD_TEMPLATE_EMPTY	0x00	The appointed Template Data are null

5.2 Flow of Enroll and Verify and Identify process

5.2.1 Enroll

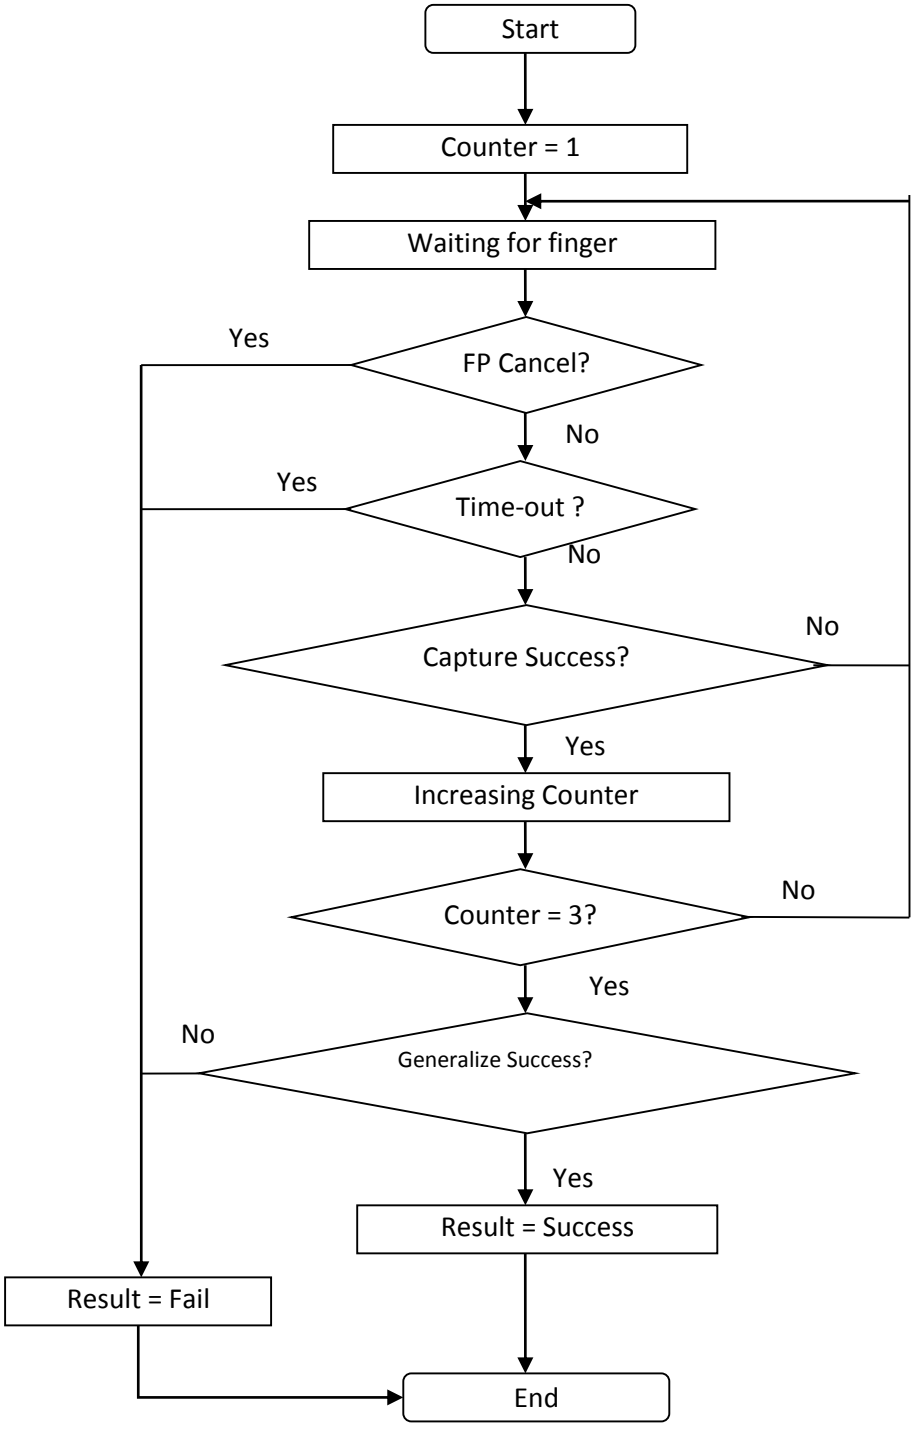

Fig 5-1 Flow of Enroll

5.2.2 Verify & Identify

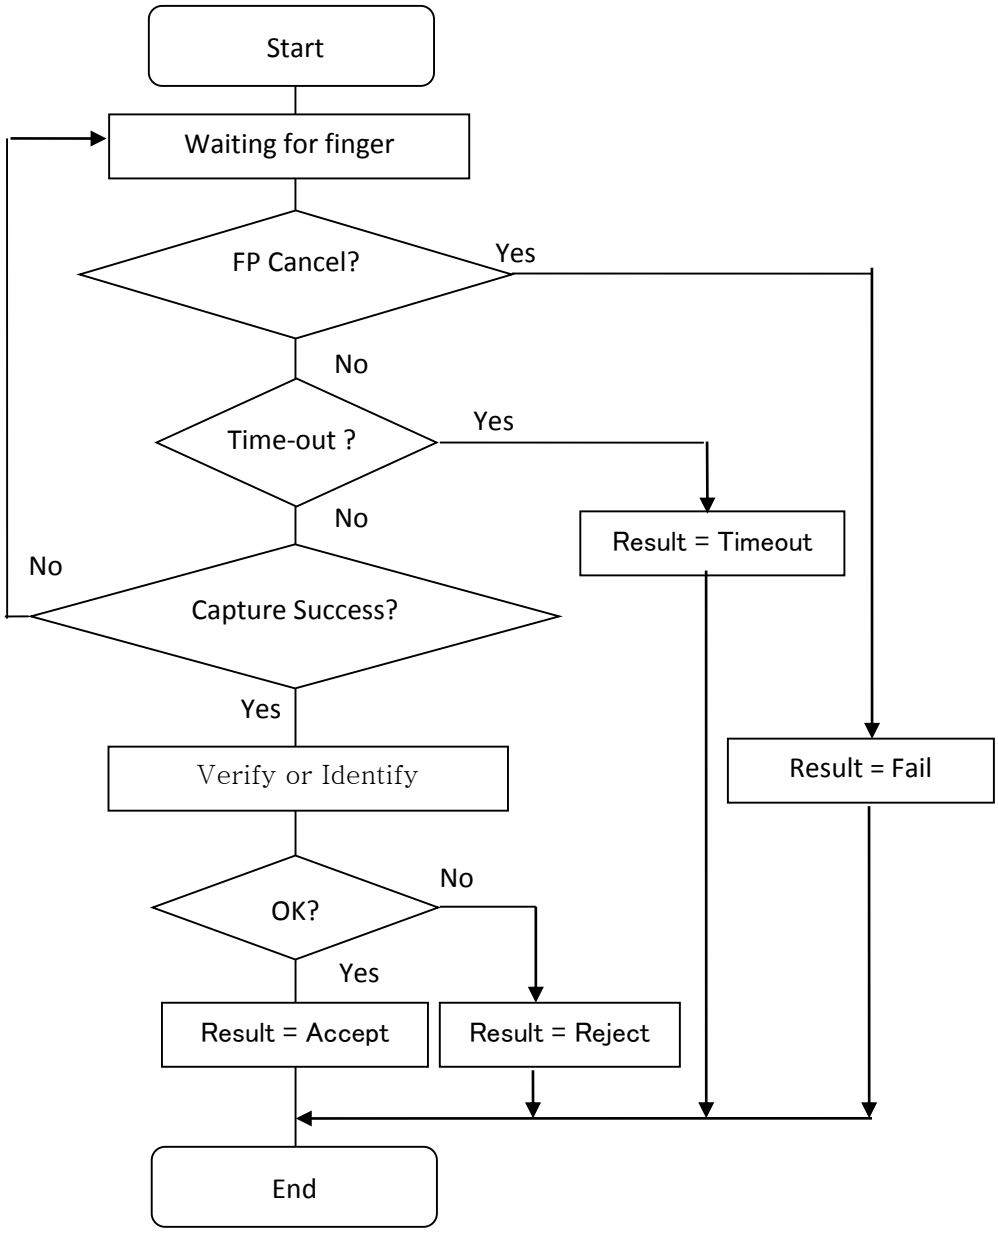

Fig 5-2 Flow of Verify and Identify